




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G06F 1/00	A1	(11) International Publication Number: WO 99/21073 (43) International Publication Date: 29 April 1999 (29.04.99)
<p>(21) International Application Number: PCT/JP98/04745</p> <p>(22) International Filing Date: 20 October 1998 (20.10.98)</p> <p>(30) Priority Data: 9/291107 23 October 1997 (23.10.97) JP</p> <p>(71) Applicant (for all designated States except US): CASIO COMPUTER CO., LTD. [JP/JP]; 6-2, Hon-machi 1-chome, Shibuya-ku, Tokyo 151-8543 (JP).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): SUZUKI, Hideo [JP/JP]; 10-11-302, Kitakarasuyama 3-chome, Setagaya-ku, Tokyo 157-0061 (JP).</p> <p>(74) Agent: KOMIZO, Satoshi; Kyohan Building, 7th floor, 47, Kandanshiki-cho 2-chome, Chiyoda-ku, Tokyo 101-0054 (JP).</p>		<p>(81) Designated States: AU, CN, KR, SG, US, European patent (CH, DE, ES, FR, GB, IT, PT).</p> <p>Published <i>With international search report.</i></p>


(54) Title: CHECKING DEVICE AND RECORDING MEDIUM FOR CHECKING THE IDENTIFICATION OF AN OPERATOR

(57) Abstract

In order to permit checking to be performed with a simple operation, a CPU (10) displays an image on a display device (14), with reference to an image location table stored in advance in a RAM (18). When coordinates on the image are sequentially designated by an input device (12), the CPU (10) sequentially compares the locations specified by the designated coordinates with those of checking points stored in the image location table. The CPU (10) determines that checking is O.K. when errors or differences between the locations compared with each other are within an allowable range and when the order of designation of the coordinates is appropriate.

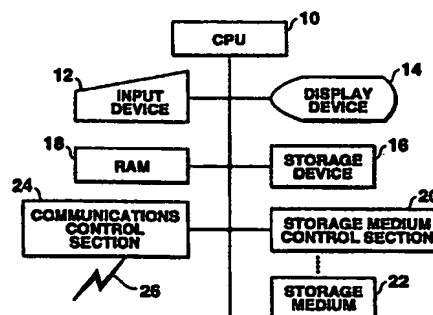

A

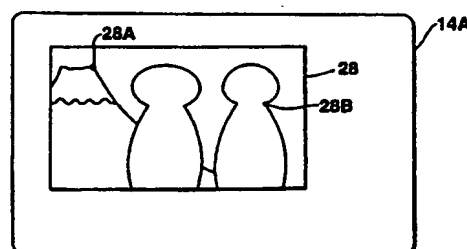

B

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

DESCRIPTION

Checking device and recording medium for checking the identification of an operator

Technical Field

5 The present invention relates to a checking device for checking the operator of information equipment, and a recording medium which stores programs for working a computer as such a checking device.

Background Art

Of late, information equipment like a personal computer, an input
10 portable terminal, etc. has become widely used.

In general, such information equipment is designed so that users can be restricted by checking passwords, in order to prevent information from being accessed by unauthorized persons.

However, the input of passwords is troublesome. This is so
15 especially in the case of a pen input portable terminal with no keyboard.

Disclosure of Invention

It is accordingly an object of the present invention to facilitate an operation for checking the operator who uses information equipment.

According to one aspect of the present invention, there is provided a
20 checking device for checking an operator, comprising:

storage means for storing in advance an image and a location of at least one checking point set to the image;

display means, having a display screen, for displaying the image;

designation means for designating any point on the display screen of
25 the display means; and

checking control means for making the display means display the image stored in the storage means in order to check the operator (to check

2

whether the operator has a right to use the information equipment), detecting that any point on the display screen of the display means has been designated by the designation means, and determining that checking is O.K (i.e. the operator has a right to use the information equipment).

- 5 when a location of the point designated by the designation means corresponds to the location of the at least one checking point stored in the storage means.

According to the checking device described above, checking is performed by the simple operation of designating at least one checking
10 point on the image. In the case of the input of a password, there is the great risk that a person who is unauthorized to use the pen input portable terminal can easily guess the password from the motions of the user's hands or the touch pen at the time of the input of the password. However, the present invention does not entail such a risk, since the location of any
15 point designated on the image is checked. If mere coordinates on the display screen which is not displaying such an image are to be designated, there will be the great possibility that the user may forget where they are. In the present invention, however, since the checking point as registered is a point on the image, the user can easily remember its location and
20 therefore can easily designate it.

According to the present invention, a plurality of images may be displayed sequentially. In this case, checking is performed by the simple operation of designating a checking point on each of the images displayed sequentially. In the case of the input of a password, there is the great risk
25 that a person who is unauthorized to use the pen input portable terminal can easily guess the password from the motions of the user's hands or the touch pen at the time of the input of the password. In the present invention, however, the locations of any points designated on the images

3

are checked. Therefore, the present invention does not entail such a risk. If mere coordinates on the display screen which is not displaying such an image are to be designated, there will be the great possibility that the user may forget where they are. In the present invention, however, since the
5 checking points as registered are points on the images, the user can easily remember their locations, and therefore can easily designate them.

Furthermore, according to the present invention, checking may be performed by the simple operation of selecting and designating a plurality of images which are displayed sequentially. In the case of the input of a
10 password, there is the great risk that a person who is unauthorized to use the pen input portable terminal can easily guess the password from the motions of the user's hands or the touch pen at the time of the input of the password. The present invention does not entail such a risk, since checking is performed by selecting and designating the sequentially
15 displayed images. If mere coordinates on the display screen which is not displaying such an image, there will be the great possibility that the user may forget where they are. The present invention does not have such a possibility, because the sequentially displayed images need only be selected and designated.

20

Brief Description of Drawings

Fig. 1A is a block diagram illustrating the structure of the pen input portable terminal which employs a checking device according to the first embodiment of the present invention;

Fig. 1B is a diagram, illustrating a display screen, for explaining
25 operations according to the first embodiment of the present invention;

Fig. 2 is a flowchart for explaining how the pen input portable terminal which employs the checking device of the first embodiment of the present invention operates;

Fig. 3A is a diagram showing a correspondence between an event and an image;

Fig. 3B is a diagram which illustrates an image location table;

Fig. 3C is a diagram for explaining a relationship between the size of
5 an image and a checking point on the image;

Fig. 3D is a diagram for explaining the location of the image origin;

Fig. 4A is a diagram which illustrates an image location table according to the second embodiment of the present invention;

Fig. 4B is a diagram, illustrating the display screen, for explaining
10 operations according to the second embodiment of the present invention;

Fig. 4C is a diagram which illustrates a check window table provided for each application in the third embodiment of the present invention;

Fig. 5 is a flowchart for explaining how the pen input portable terminal which employs a checking device according to the second embodiment of
15 the present invention operates;

Fig. 6A is a diagram, illustrating variations of the display screen, for explaining operations according to the third embodiment of the present invention; and

Fig. 6B is a flowchart for explaining how the pen input portable terminal
20 which employs a checking device according to the third embodiment of the present invention operates.

Best Mode for Carrying Out the Invention

First Embodiment

Fig. 1A is a diagram showing the structure of the pen input portable
25 terminal employing the checking device according to the first embodiment of the present invention. In the illustration, reference numeral 10 denotes a CPU serving as a control section which controls the entirety of the pen input portable terminal. Reference numeral 12 represents an input

device which includes a touch panel, a touch pen, etc. The touch panel is arranged at the display screen of a display device 14 such as an LCD display, for example. Reference numeral 16 denotes a storage device like a hard disk, a ROM or the like which stores images to be displayed, for example. Reference numeral 18 represents a RAM storing an image location table to be described later.

Reference numeral 20 denotes a storage medium control section which controls the storing and reading of data in and from a storage medium 22 such as a loaded floppy disk, an optical (magnetic) disk or the like. Reference numeral 24 represents a communications control section which transfers and receives data to and from an external device through a communications line 26 (which may be a cable or radio waves).

Processing programs and data, etc., which the CPU 10 executes to work as the checking device, are stored in the storage device 16 or the storage medium 22 in advance. Needless to say, however, they may not be in the storage device 16 or the storage medium 22, and may be received from any other device connected to the communications line 26 or the like, and then may be stored (in a non-illustrated work memory provided in the RAM 18, for example). Alternatively, any other device connected to the communications line 26 or the like may include a storage unit or a storage medium, and the programs and data stored therein may be transferred therefrom through the communications line 26.

Operations according to the above-described structure will now be described.

According to the checking device of the first embodiment, as illustrated in Fig. 1B, the display screen 14A of the display device 14 displays an image 28 preset and stored in advance. When any points on the image 28 are designated by the touch pen of the input device 12, the checking

6

device determines whether the locations of the designated points coincide with those of points 28A and 28B preset and stored in advance, thereby determining whether checking is O.K. or N.G.

Fig. 2 is a flowchart showing such procedures. Either the storage
5 device 16 or the storage medium 22 stores programs for realizing the individual functions shown in the above flowchart, in the form of program codes readable by the CPU 10.

Fig. 3A illustrates a table which a user has preset and stored in the RAM 18 in advance. This table lists a plurality of events (the activation of
10 the pen input portable terminal and the activation of a specific application) and images (images A and B) in association with each other. First, the CPU 10 selects one of the images which corresponds to the current event from the table of Fig. 3A (step S10). After this, the CPU 10 sets the initial value "1" in both a rank register and an image ratio register, which are
15 included in the CPU 10 or the RAM 18 (step S12).

The user can select one or more checking points on each image (A and B) and store their locations beforehand in the image location table stored in the RAM 18 and illustrated in Fig. 3B. The value set in the rank register indicates the order of designation of the checking points. As
20 seen from Fig. 3B, the image location table stores, in association with each checking point, its location on the corresponding image and its rank in the designation order. The checking points' locations on the image are not relative coordinates from the origin (0, 0) which is located at the left corner of the image as shown in Fig. 3C (the relative coordinates of the
25 checking point which is first in rank is (w1, h1), for example), but the "ratio positions" which are expressed in the ratio of the relative coordinates from the origin (0, 0) to the dimensions, i.e., the width WA (or WB) and height HA (or HB) of the image. This is because the scale of such an image can

be freely increased or reduced. If the image scale is increased or reduced, variations will occur also in the points' locations (relative coordinates) from the origin. The ratio positions are adopted in view of such a possible change in the image scale. The value set in the image
5 ratio register indicates the display scale of a selected image.

After the selection of the image and the initialization of each register, the CPU 10 makes the display device 14 display the selected image so as to begin from the image origin and on the scale represented by the value set in the image ratio register (step S14). The coordinates of the image
10 origin are those from the display coordinates origin located at the upper left corner of the display screen 14A, and may be preset, prestored coordinates or may be randomly occurring coordinates.

Then the CPU 10 determines whether inputs have been made with the touch pen of the input device 12 (step S16). When the CPU 10
15 determines whether no inputs have been made, it updates the coordinates of the image origin, and alters the value set in the image ratio register (step S18), after which the CPU 10 returns to the step S14. As a result, the position and size of the image vary as shown by broken lines in Fig.
3D.

20 When the CPU 10 determines that inputs have been made with the touch pen, it attains the coordinates of the points designated by the touch pen (step S20), and derives the locations of the designated points from the attained coordinates (step S22). The location of each point can be derived by subtracting the coordinates of the image origin from the point's
25 coordinates. Then, the CPU 10 calculates the ratio positions of the designated points on the basis of the derived locations and the dimensions of the image (step S24). In the case of a point whose location is specified by (xs, ys), for example, its ratio position is (xs/WA, ys/HA). Having thus

8

calculated the ratio positions of the designated points, the CPU 10 compares the calculated ratio positions with those stored in the image location table and corresponding in rank to the calculated ratio positions (step S26), and determines whether any errors or differences between the 5 ratio positions as compared with each other are within a predetermined allowable range (step S28). When the CPU 10 determines that the errors are not within the allowable range, it generates an alarm and terminates processing (step S30).

When the CPU 10 determines that the errors are within the allowable 10 range, it refers to the image location table and determines whether the rank represented by the value set in the rank register is last or not (step S32). When the CPU 10 determines that the rank is not last, the CPU 10 updates (counts up) the value set in the rank register (step S34) and returns to the step S14.

15 When the CPU 10 determines that the rank is last, then it determines that checking is O.K., and activates the pen input portable terminal or the application (step S36).

Thus, an image registered in advance, not a password input screen, is displayed and it is checked whether each of the points predetermined on 20 the image has been designated by the touch pen. When it is determined that each of the predetermined points on the image has been designated by the touch pen, it is then determined that checking is O.K.

More specifically, the user selects a desired image in advance, and registers desired points on the image and their designation order in 25 advance. At the time the pen input portable terminal is initially activated upon turning on of the power, or at the time a specific application is activated, the selected image is displayed on the display screen, and the pen input portable terminal waits until any points on the displayed image

are designated by the touch pen (in this case, the display position and display size of the image are changed in order to enhance security).

When any points on the displayed image are designated by the touch pen, it is determined whether the ratio positions (not the display coordinates)

5 and designation order of the points coincide with those registered in advance. When it is determined that the ratio positions and designation order of the points coincide with those registered in advance, it is determined that checking is O.K., and then the terminal is rendered usable.

10 Thus, a troublesome input of a password is unnecessary. In the case of a password, there is the great risk that a person who is unauthorized to use the pen input portable terminal can easily guess the password from the motions of the user's hands or the touch pen at the time of the input of the password. In the present invention, however, the locations of the
15 checking points designated on the image are checked. Accordingly, the present invention does not entail such a risk.

Since the checking points are points on the image, the user can easily remember their locations (if mere coordinates on the display screen which is not displaying such an image are to be designated, there is the great
20 possibility that the user may forget their positions).

It is preferred that the display position and display size of the image be changed every time. (This will be helpful to enhance security. If the same point is designated again and again by the touch pen, the mark of the pen may be made on the display screen, which entails the possibility
25 that any other person can perceive the locations of the points registered in advance. If, however, the display position and display size of the image is changed every time, the locations of the points to be designated by the touch pen are not constant, with a great merit of the aforementioned

10

possibility being avoided.)

In the above embodiment, the ratio positions are set and stored in the image location table. Needless to say, however, the relative coordinates from the image origin can be stored therein in place of the ratio positions, if
5 the image size is not changed.

Updating the coordinates of the image origin and altering the value set in the image ratio register are both performed in the step S18 of the above-described embodiment. However, one of them may be performed in the step S18.

10

Second Embodiment

The second embodiment of the present invention will now be described.

The structure of the pen input portable terminal, which employs the checking device of the second embodiment, will not be explained
15 hereinafter, since it is the same as that of the pen input portable terminal of the first embodiment. In the second embodiment, however, the image location table stored in the RAM 18 is as illustrated in Fig. 4A. More specifically, the image location table of the second embodiment stores, in association with each image window, its display position and its registered
20 coordinates.

Fig. 5 is a flowchart for explaining the operation of the pen input portable terminal employing the checking device of the second embodiment. The storage device 16 or the storage medium 22 stores the programs for realizing the individual functions shown in the above
25 flowchart, in the form of the program codes readable by the CPU 10.

According to the second embodiment, the CPU 10 selects the first image (image A) from the image location table (step S40). Then, the CPU 10 makes the display device 14 display the selected image as an

image window in accordance with the corresponding display position stored in the image location table (step S42). The CPU 10 waits until any input is made with the touch pen of the input device 12 (step S44).

When the CPU 10 determines that any input has been made with the touch pen, it attains the coordinates of the point designated by the touch pen (step S46), and derives the point's location from the attained coordinates in the same manner as that of the first embodiment (step S48). Then, the CPU 10 compares the derived location with that specified by the registered coordinates which the image location table stores in association with the selected image (step S50), and determines whether an error or difference between both locations as compared with each other is within a predetermined allowable range (step S52). When the CPU 10 determines that the error is not within the allowable range, it generates an alarm and terminates processing (step S54).

15 When the CPU 10 determines that the error is within the allowable range, it refers to the image location table and determines whether the selected image is the last image or not (step S56). When the CPU 10 determines that the selected image is not the last image, the CPU 10 selects the next image (step S58), and returns to the step S42.

20 When the CPU 10 determines that the selected image is the last image, then it determines that checking is O.K., and activates the pen input portable terminal (step S60).

Thus, according to the second embodiment, a plurality of images preset and stored in advance are sequentially displayed in order to perform checking, as illustrated in Fig. 4B. When it is detected during the display of the images that any points on the display screen have been designated, the locations of the designated points are compared with those stored in advance. When the locations of the designated points

coincide with those stored in advance, it is determined that checking is O.K.

In the second embodiment, as well as in the case of the first embodiment, the display position and display size of the image window 5 can be changed every time. Needless to say, the ratio positions may be adopted in place of the registered coordinates.

Third Embodiment

The third embodiment of the present invention will now be described.

The structure of the pen input portable terminal, which employs the 10 checking device of the third embodiment, will not be explained hereinafter, because it is the same as that of the pen input portable terminal of the first embodiment.

In the third embodiment, however, the RAM 18 stores, not the image location table, but a checking window table provided for each application, 15 as illustrated in Fig. 4C. The checking window table stores a plurality of display icons and a registered icon in association with each window.

To be specific, when activating one application, a reference is made to the corresponding checking window table, and a plurality of icons are displayed in the head window as illustrated in Fig. 6A. When one of the 20 icons displayed in the head window is selected and designated, it is determined whether the designated icon is identical with a registered one. In the case where the designated icon is identical with it, the next window (window A) is displayed. When a registered icon is designated in the last window (window G), it is determined that checking is O.K.

25 In that case, it is preferred that the icons be related in content with each other. For example, icon "a" is the image of a mountain, icon "b" is the image of an ocean, icon "c" is the image of a forest, icon "d" is the image of an island, icon "e" is the image of Mt. Everest, icon "f" is the

13

image of Mt. Fuji, icon "g" is the image of Mt. Kilimanjaro, and icon "h" is the image of Mt. Etna. Icon "i" is the image of Mt. Vesuvius, icon "j" is the image of Mt. Elbert, and icon "k" is the image of Mt. Cleveland.

Fig. 6B is a flowchart for explaining the above-described operation of the pen input portable terminal employing the checking device according to the third embodiment. The storage device 16 or the storage medium 22 stores the programs for realizing the individual functions shown in the above flowchart, in the form of the program codes readable by the CPU 10.

10 To be specific, according to the third embodiment, the CPU 10 selects the head window from the corresponding checking window table (step S70), and makes the display device 14 display icons in the selected window (step S72). The CPU 10 waits until any icon is designated with the touch pen of the input device 12 (step S74).

15 When any icon is designated with the touch pen, then the CPU 10 refers to the check window table and determines whether the designated icon is the registered icon which the check window table stores in association with the selected window (step S76). When the designated icon is not the registered icon, the CPU 10 generates an alarm and
20 terminates processing (step S78).

When the designated icon is the registered icon, the CPU 10 refers to the checking window table and determines whether the currently selected window is the last window (step S80). When the currently selected window is not the last window, the CPU 10 selects the next window (step
25 S82), and returns to the step S72.

When the currently selected window is the last window (window G), the CPU 10 determines that checking is O.K., and activates the corresponding application (step S84).

14

Explained in the first to third embodiments is the case where the checking device is applied to the pen input portable terminal. However, the present invention is not limited thereto, and the checking device is applicable also to any other information equipment such as a personal
5 computer, etc.

15

CLAIMS

1. A checking device for checking an operator, comprising:
storage means (16,18) for storing in advance an image and a location
of at least one checking point set to said image;
5 display means (14), having a display screen, for displaying said image;
designation means (12,14) for designating any point on the display
screen of said display means (14); and
checking control means (10) for making said display means (14)
display said image stored in said storage means (16,18) in order to check
10 the operator, detecting that any point on the display screen of said display
means has been designated by said designation means (12,14), and
determining that checking is O.K. when a location of the point designated
by said designation means corresponds to the location of said at least one
checking point stored in said storage means (16,18).
- 15 2. The checking device according to claim 1, wherein based on the
location of the designated point on said display screen and a display
position of said image displayed on said display means (14), said checking
control means (10) locates the designated point on said image displayed
on said display screen, and determines that checking O.K. when the
20 designated point's location on said image corresponds to the location of
said at least one checking point stored in said storage means.
3. The checking device according to claim 1, wherein said storage
means (16,18) stores the location of said at least one checking point as
relative coordinates on said image.

4. The checking device according to claim 1, wherein the location of said at least one checking point stored in said storage means (16,18) and the location of the designated point detected by said checking control means (10) are ratio positions each being expressed in a ratio of relative
5 coordinates on said image to dimensions of said image.

5. The checking device according to claim 1, wherein:
said storage means (16,18) stores locations of a plurality of checking points set to said image and a designation order in which said plurality of checking points are to be designated by said designation means (12,14);
10 and

said checking control means (10) detects that any points on said display screen have been designated by said designation means (12,14), and determines that checking is O.K. when locations and designation order of the points designated by said designation means (12,14)
15 correspond to the locations and designation order of said plurality of checking points stored in said storage means (16,18).

6. The checking device according to claim 1, wherein said storage means (16,18) stores said image and said at least one checking point for each of programs to be activated.

20 7. A checking device for checking an operator, comprising:
storage means (16,18) for storing, in advance, images and locations of a plurality of checking points set to said images;
display means (14), having a display screen, for displaying said images;
25 designation means (12,14) for designating any points on the display

17

screen of said display means (14); and

checking control means (10) for making said display means (14)

sequentially display said images stored in said storage means (16,18) in

order to check the operator, detecting that any points on the display

5 screen of said display means (14) have been designated by said

designation means (12,14), and determining that checking is O.K. when

locations of the points designated by said designation means (12,14)

correspond to the locations of said plurality of checking points stored in

said storage means (16,18).

10 8. The checking device according to claim 7, wherein said checking

control means (10) makes said display means (14) display said images

sequentially, and when said checking control means (10), while said

display means (14) is displaying one of said images, detects that a point

on said display screen has been designated by said designation means

15 (12,14) and determines that the location of the designated point

corresponds to the location of one of said plurality of checking points

which has been set to said one image, said checking control means (10)

makes said display means (14) display a next one of said images.

9. A checking device for checking an operator, comprising:

20 sequential display means (14) for sequentially displaying display
images each being associated with one of predetermined designating
operations;

designating operation means (12,14) for performing designating
operations with respect to said display images sequentially displayed on

18

said sequential display means (14); and

determination means (10) for determining whether the designating operations performed by said designating operation means (12,14) are appropriate, depending on whether the designating operations performed
5 by said designating operation means (12,14) correspond to said predetermined designating operations.

10. The checking device according to claim 9, wherein:

said display images are window images;

said sequential display means (14) displays said window images in an
10 a state of overlapping one another; and

when said determination means (10) determines that a designating operation, which said designating operation means (12,14) performs with respect to one of said window images, corresponds to one of said predetermined operations, said sequential display means (14) displays a
15 next one of said window images.

11. The checking device according to claim 9, wherein said display images are window images, and the designating operations performed by said designating operation are operations to select and designate icons which are displayed in said window images.

20 12. The checking device according to claim 9, wherein said display images are window images, and the designating operations performed by said designating operation means (12,14) are operations to designate any points on images which are displayed in said window images.

13. A recording medium (16,20,22,24,26) having a program stored

19

therein, said program being readable by a computer and containing instructions to make the computer check an operator by steps of:

storing in advance an image and a location of at least one checking point set to said image;

5 displaying said image as stored;

detecting that any point on a display screen has been designated, and determining that checking is O.K. when a location of the designated point corresponds to the location of said at least one checking point as stored.

14. A recording medium (16,20,22,24,26) having a program stored
10 therein, said program being readable by a computer and containing instructions to make the computer check an operator by steps of:

storing, in advance, images and locations of a plurality of checking points set to said images;

sequentially displaying said images as stored, detecting that any
15 points on a display screen have been designated during a display of said window images, and determining that checking is O.K. when locations of the designated points correspond to the locations of said plurality of checking points as stored.

15. A recording medium (16,20,22,24,26) having a program stored
20 therein, said program being readable by a computer and containing instructions to make the computer check an operator by steps of:



sequentially displaying display images each being associated with one of predetermined designating operations; and

determining whether designating operations performed with respect to
25 said display images displayed sequentially are appropriate, depending on whether the designating operations correspond to said predetermined

designating operations.

THIS PAGE BLANK (USPTO)

1/6

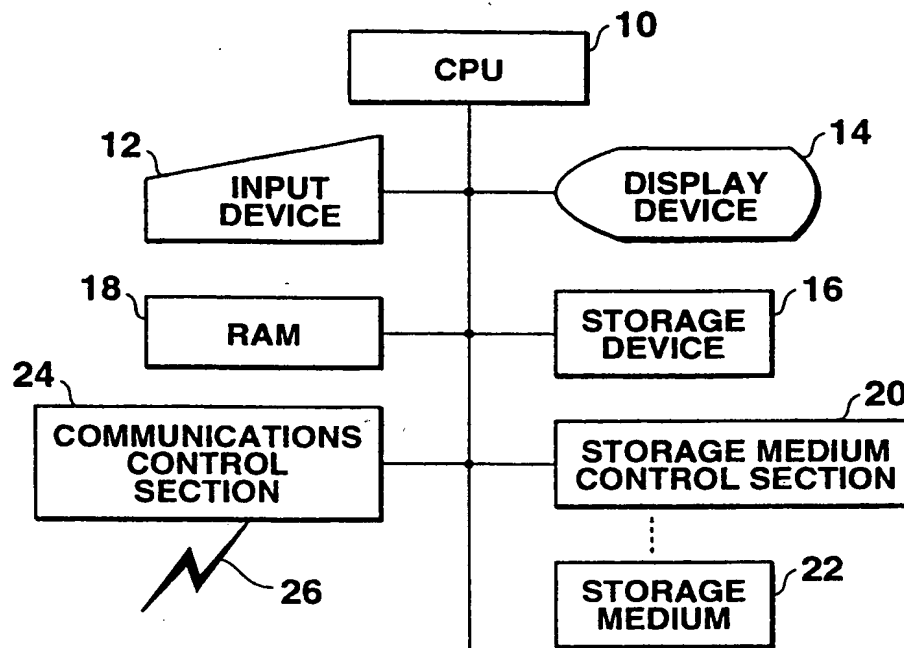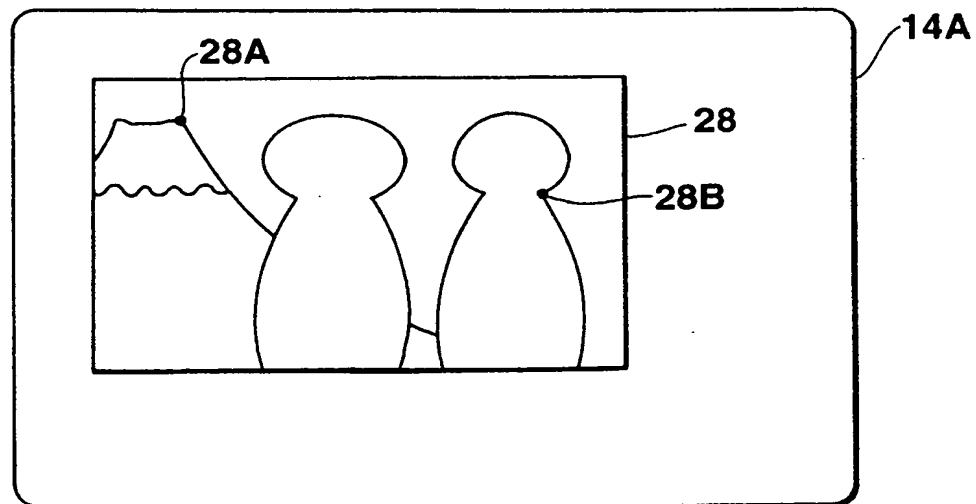**FIG.1A****FIG.1B**

THIS PAGE BLANK (USPTO)

2/6

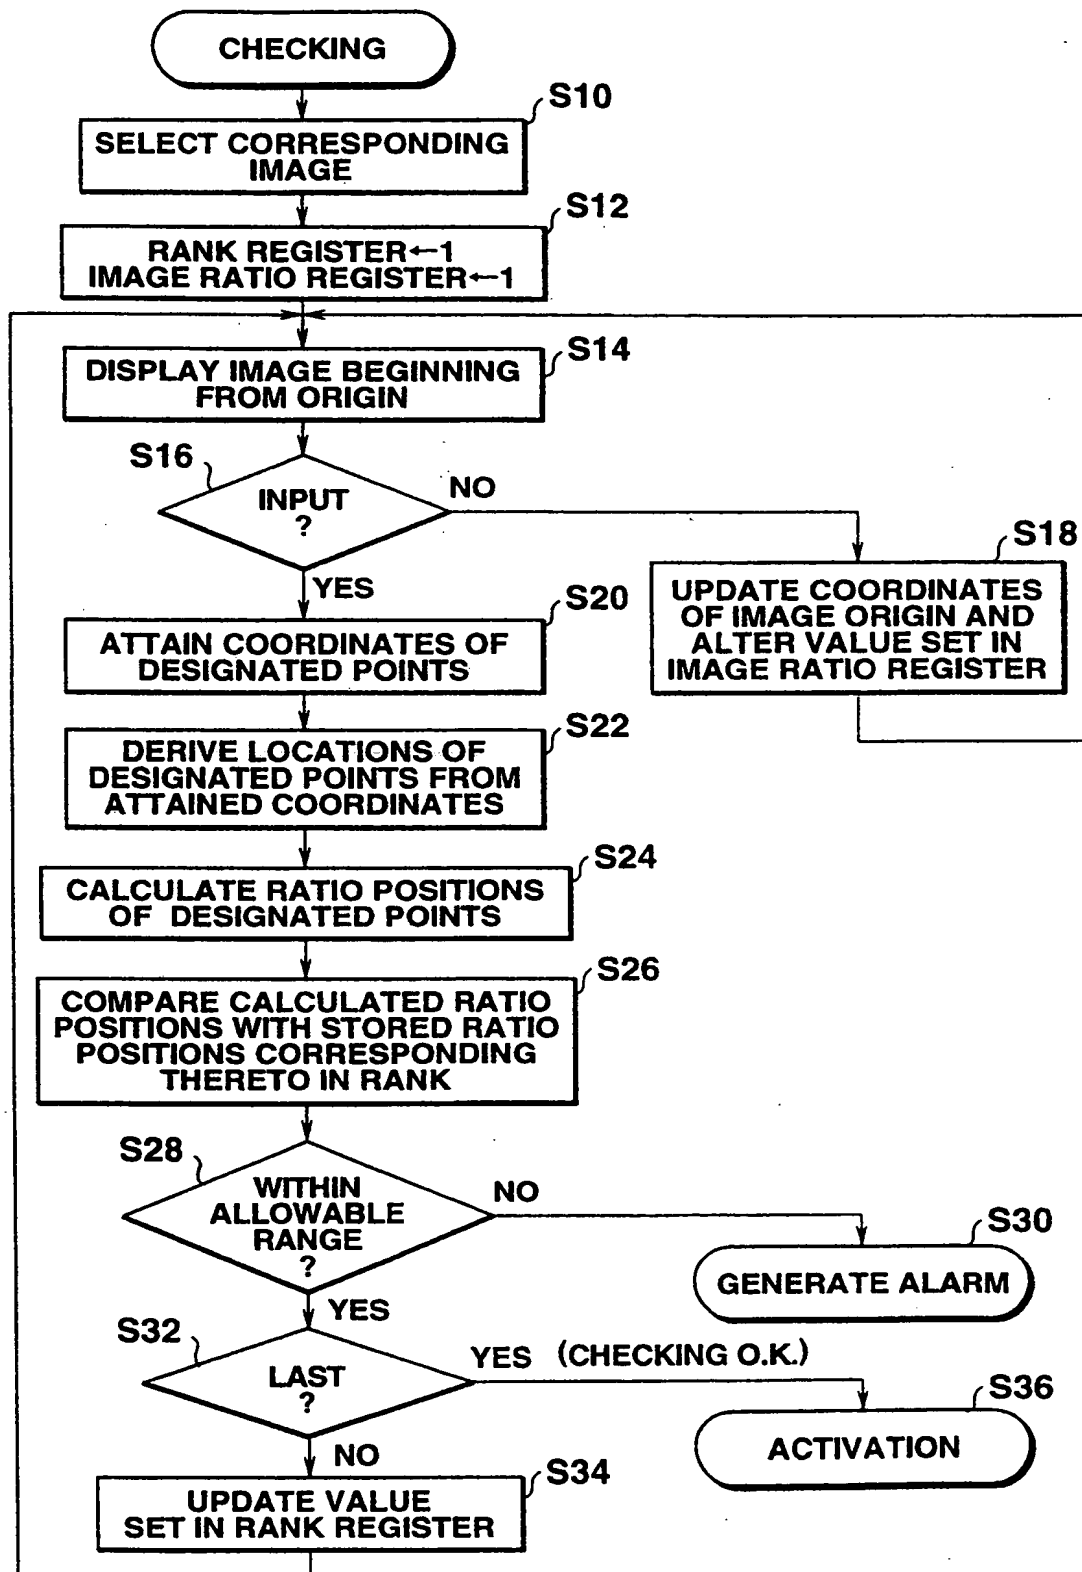


FIG.2

THIS PAGE BLANK (USPTO)

3/6

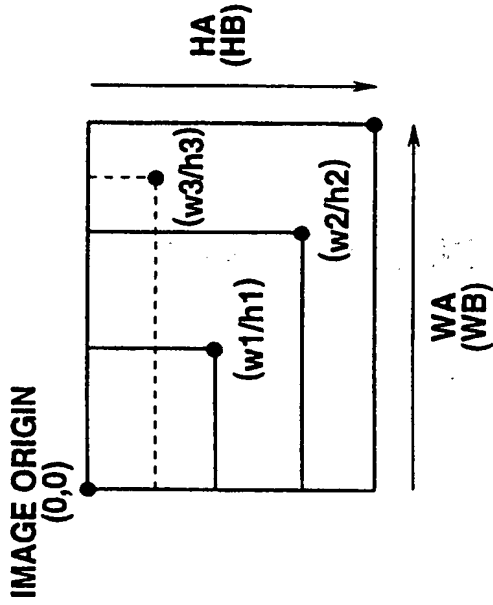


FIG.3C

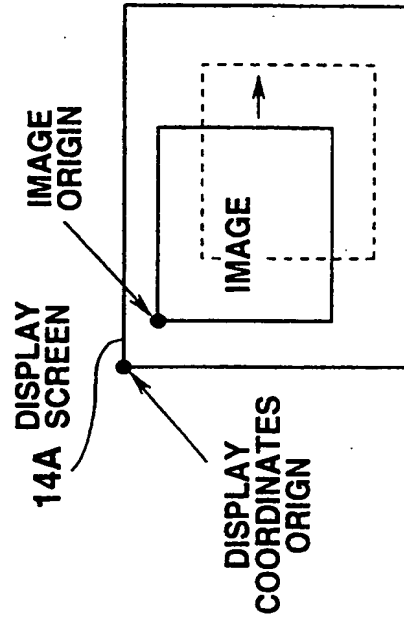


FIG.3D

ACTIVATION OF TERMINAL	IMAGE A
ACTIVATION OF SPECIFIC APPLICATION	IMAGE B

FIG.3A

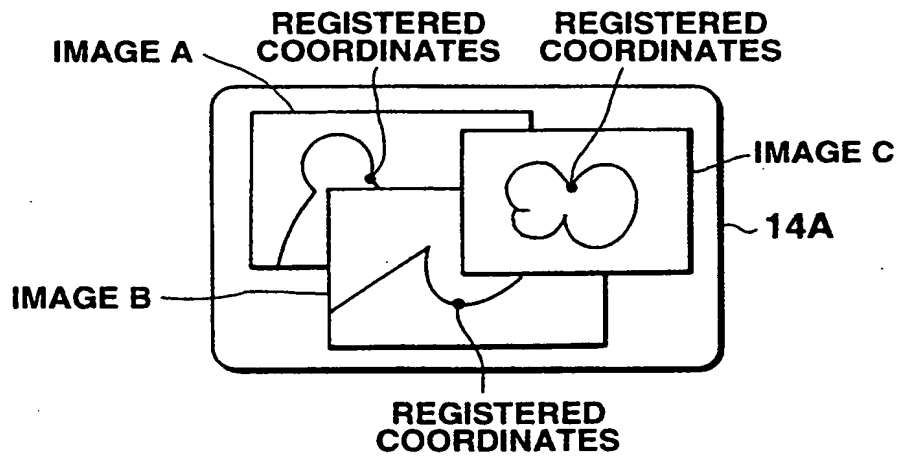
RATIO POSITION		RANK
IMAGE A	$(w1/WA) (h1/HA)$	1
	$(w2/WA) (h2/HA)$	2
	$(w3/WA) (h3/HA)$	LAST
IMAGE B	$w4/WB, h4/WB$	LAST

FIG.3B

THIS PAGE BLANK (USPTO)

4/6

IMAGE WINDOW	DISPLAY POSITION	REGISTERED COORDINATES
IMAGE A		
IMAGE B		
IMAGE C		

FIG.4A**FIG.4B**

NAME OF WINDOW	DISPLAY ICON	REGISTERED ICON
HEAD WINDOW	a,b,c,d	a
WINDOW A	e,f,g,h	g
WINDOW G	i, j, k	i

FIG.4C

THIS PAGE BLANK (USPTO)

5/6

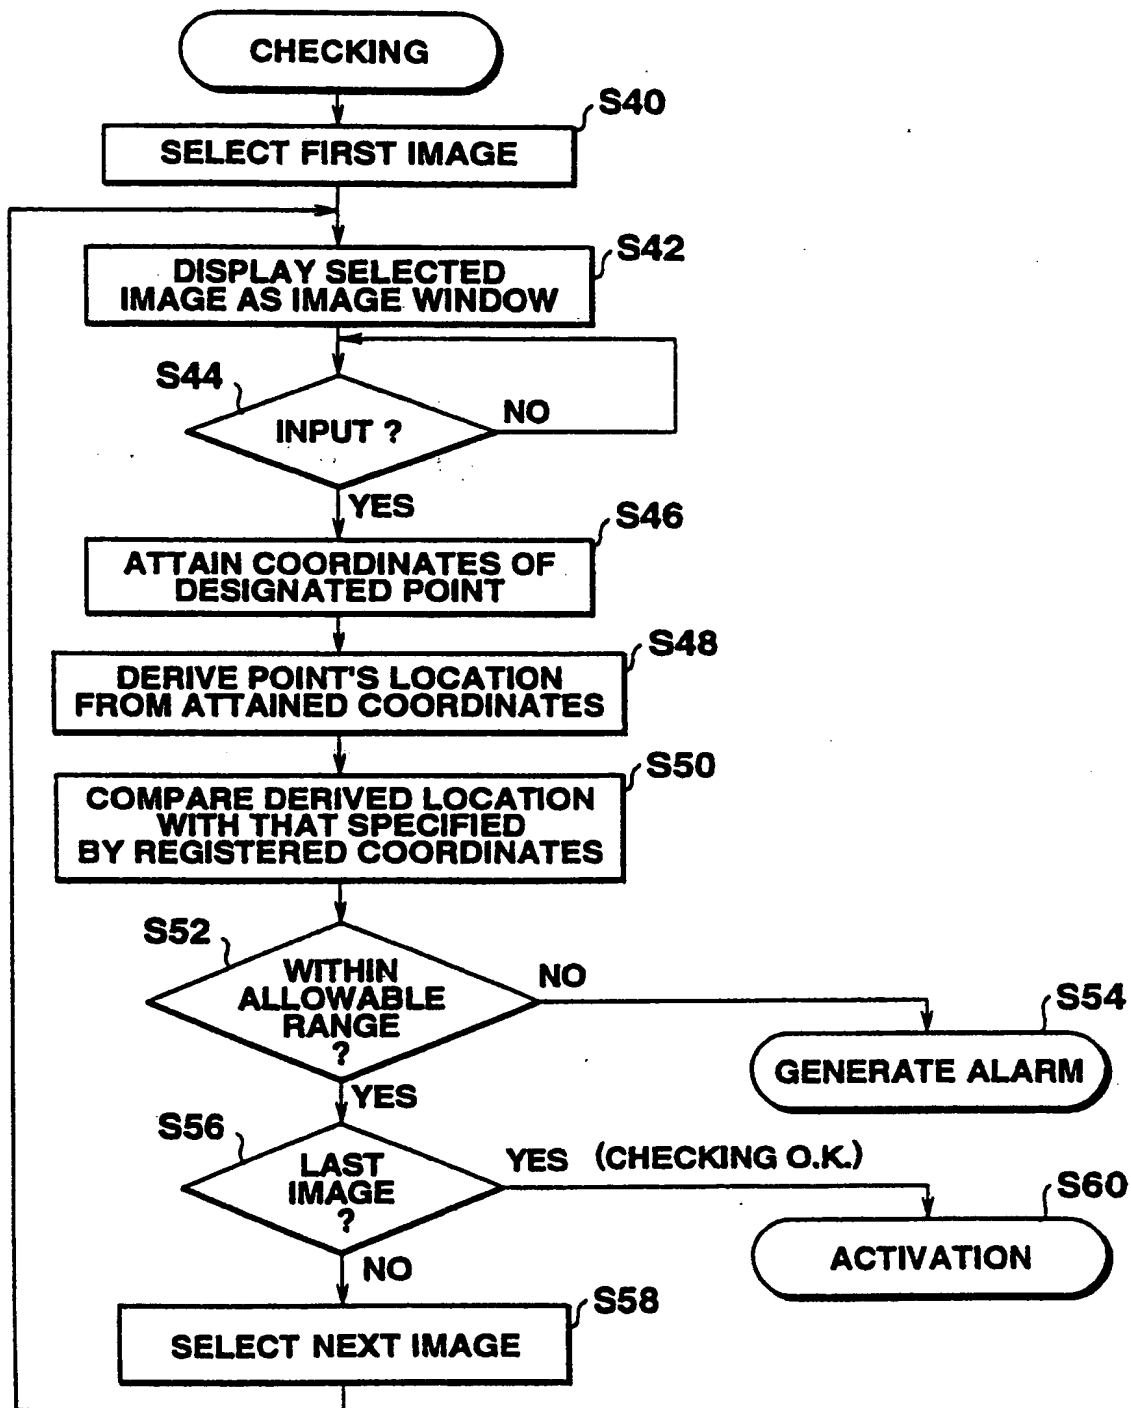


FIG.5

THIS PAGE BLANK (USPTO)

6/6

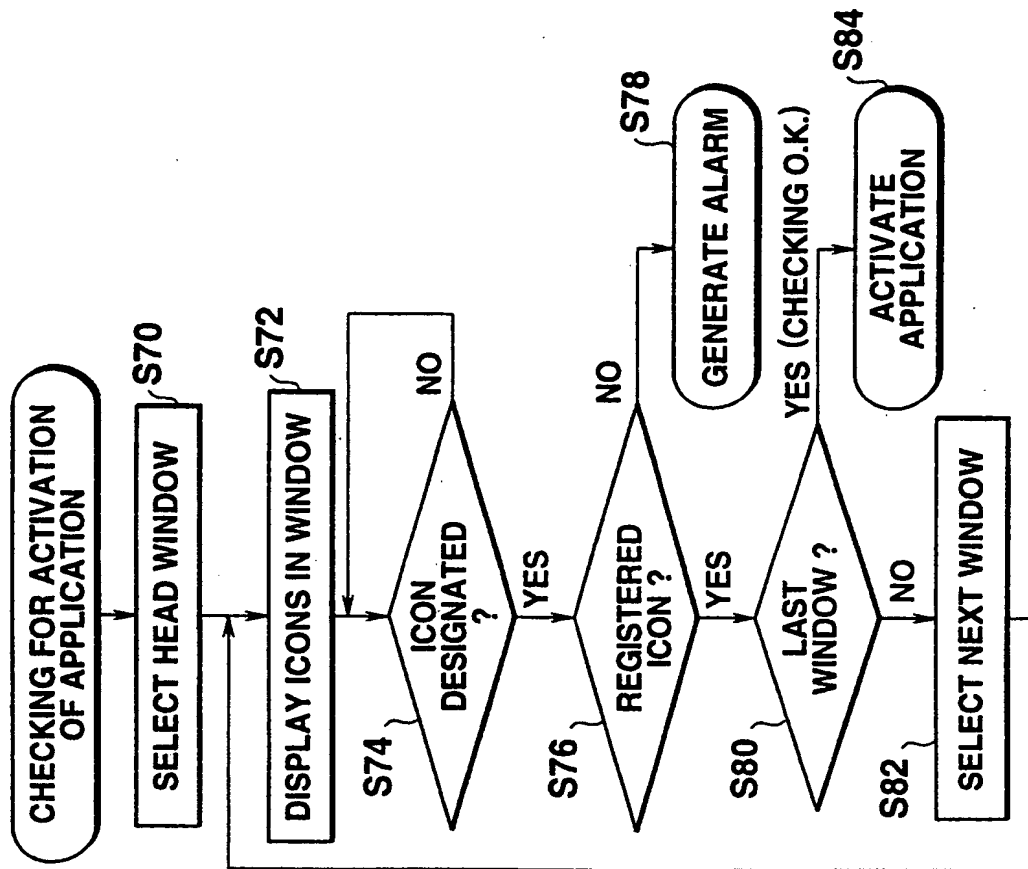


FIG.6B

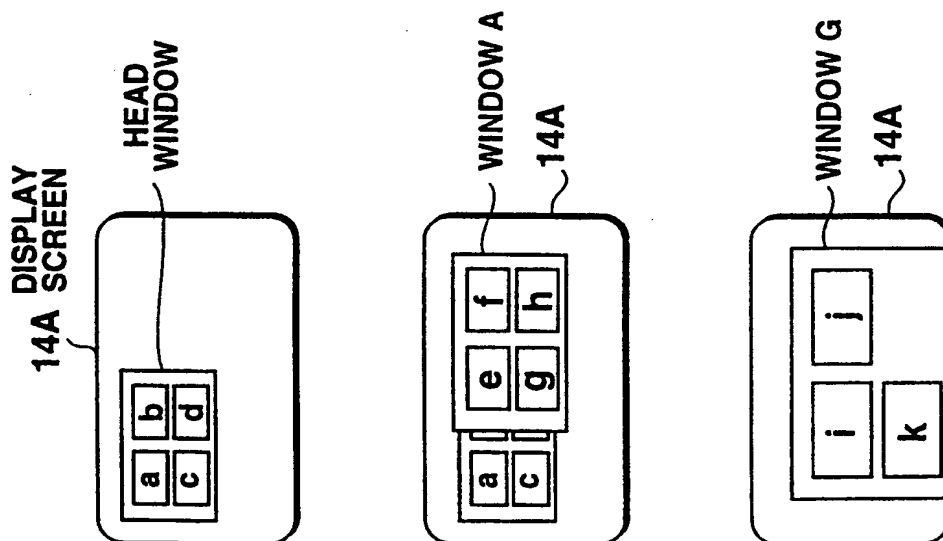


FIG.6A

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

In tional Application No
PCT/JP 98/04745

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G06F1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 677 801 A (AT & T CORP) 18 October 1995 see abstract; figure 4 see column 1, line 44 - column 2, line 51 see column 5, line 23 - column 6, line 32	1,2,5-9, 13-15
A	-----	3,4, 10-12
A	EP 0 543 304 A (IBM) 26 May 1993 see the whole document	6,9
A	----- "MENU ICON WITH HIDDEN GEOMETRICAL PASSWORD" IBM TECHNICAL DISCLOSURE BULLETIN, vol. 32, no. 10B, 1 March 1990, page 463/464 XP000097958 see the whole document ----- -/-	6,9-12

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

26 January 1999

Date of mailing of the international search report

03/02/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Powell, D

INTERNATIONAL SEARCH REPORT

In ternational Application No
PCT/JP 98/04745

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 345 549 A (APPEL ARTHUR ET AL) 6 September 1994 see the whole document -----	6,9

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP 98/04745

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0677801 A	18-10-1995	JP 7295673 A SG 24112 A US 5559961 A	10-11-1995 10-02-1996 24-09-1996
EP 0543304 A	26-05-1993	DE 69210764 D JP 5274269 A	20-06-1996 22-10-1993
US 5345549 A	06-09-1994	JP 6199208 A	19-07-1994

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)